

Broadcast Access

Broadcast Access delivers video broadcast connectivity over the Openreach fibre network using recognised video transmission standards. It supports **video conferencing**, **video transmission requirements** for popular live events and the **streaming of video and media content** to TV studios or post production locations.

Circuits can be provided to both permanent locations and mobile Outside Broadcast (OB) units throughout the UK.

Product benefits

Recognised video transmission standards

Ensures seamless integration with the existing video equipment or networks of television, media and production companies. Use of native transmission standards means there is no need to convert between different formats either. High bandwidth options support 1080i and 1080p High Definition video signals.

Long fibre distance limits

Enables service to remote locations across the country.

Fit for purpose

Purpose built to optimise the sharing and transmission of video or media content. Ideal for both permanent locations and mobile Outside Broadcast (OB) units throughout the UK.

Flexible use

Media content can be transported simultaneously from different stages, proceedings, games or locations.

Fast and secure

High bandwidth Point-to-Point service enables fast sharing of content.

Environmentally considerate

Enables video conferencing, thereby helping businesses to reduce travel requirements and their carbon footprint.


Peace of mind for critical connections

Resilience Option 2 offers affordable protection against fibre breaks and unforeseen issues.

Nationwide coverage

National network with 26,000 engineers on hand to support your access requirements.

Connection capabilities

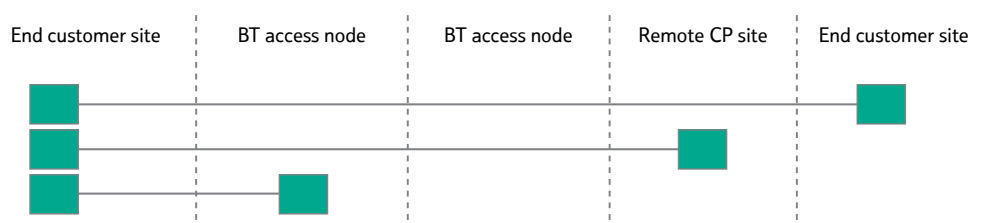


Product features:

- Circuits can support up to four unidirectional or two bidirectional video channels
- Electrical customer interface (BNC)
- Supports customer video signals at 270Mbps (SDI or ASI), 1.485 Gbps (HD-SDI) or 3Gbps (HD-SDI) and 140 Mbps framed data for carrying bespoke video services
- Video framing verification by the NTE to allow only specified video services to fibre
- 1 Rack Unit (1U) NTE housing. NTE is installed in a rack in the CP's area in a local exchange (BT Locate or NetLocate)
- Circuits can be reconfigured to support up to 4 channels without the need for additional access fibre
- Billed separately from other Ethernet products but covered by a single Connectivity Services contract
- 5 hour fix target for NTE or fibre faults

Circuit reach:

- Maximum main link radial distance: 35km
- Maximum route fibre distance: 70km

How it works

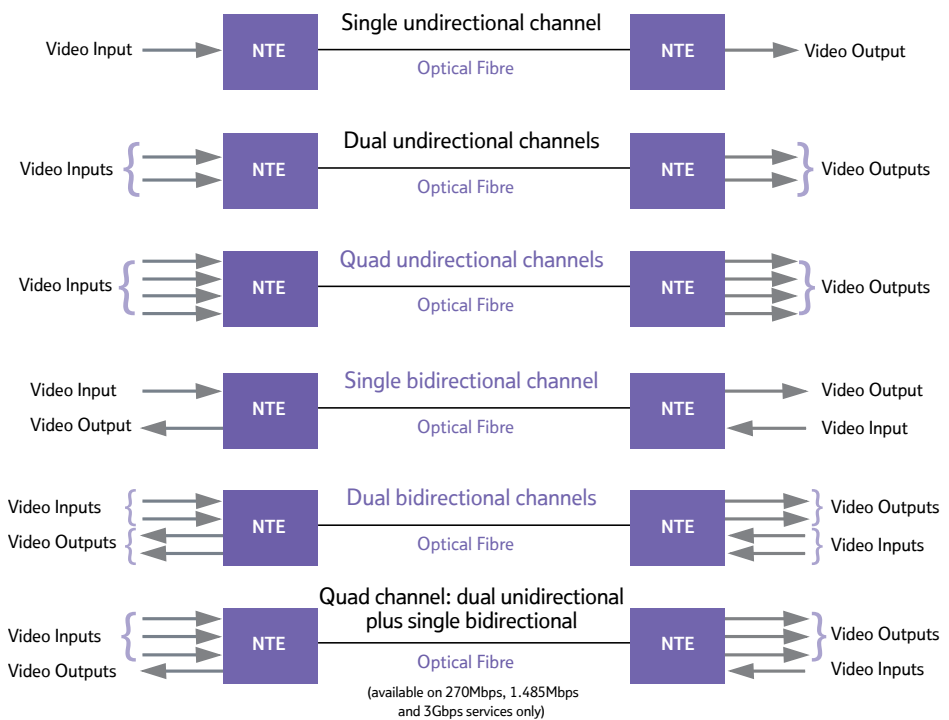

The diagram above shows the various Bandwidth and channel options available with Broadcast Access.

Available bandwidths



www.openreach.co.uk

The telecommunications services described in this publication are subject to availability and may be modified from time to time. Services and equipment are provided subject to British Telecommunications plc's respective standard conditions of contract. Nothing in this publication forms any part of any contract. Openreach and the Openreach logo are trademarks of British Telecommunications plc. © British Telecommunications plc 2018.

Openreach Limited
Registered office: Kelvin House, 123 Judd Street, London WC1H 9NP.
Registered in England and Wales no. 10690039.
Produced by Openreach.
Designed by Westhill.co.uk

PHME 83422

For more information on Broadcast Access visit www.openreach.co.uk or contact your Openreach sales and relationship manager.